


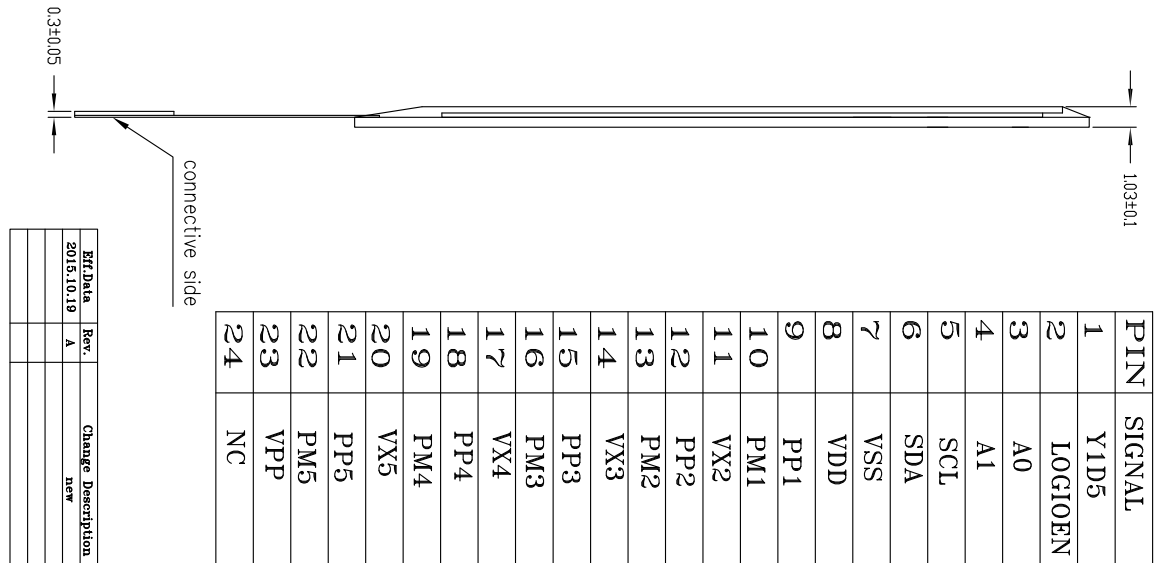

PIN	SIGNAL
1	Y1D5
2	LOGIOEN
3	A0
4	A1
5	SCL
6	SDA
7	VSS
8	VDD
9	PP1
10	PM1
11	VX2
12	PP2
13	PM2
14	VX3
15	PP3
16	PM3
17	VX4
18	PP4
19	PM4
20	VX5
21	PP5
22	PM5
23	VPP
24	NC

Eff.Data	Rev.	Change Description
2015.10.19	A	new

 DKE 东方科脉 DRUGS & MEDICAL EQUIPMENT DEVELOPMENT	
DESIGN MODEL	DEP0066-I
REV. A	DATE 2015.10.19
CUSTOMER MODEL	CHECKED BY SY ZHAO
PAGE 1/2	DRAWN BY LI WANG
	UTTING HR ZHANG HE

1 TOLERANCES UNLESS OTHERWISE
2 SPECIFIED :±0.2
3 ALL DIMENSIONS ARE IN mm

3 OPERATING TEMP: 0°C TO 50°C
STORAGE TEMP: -20°C TO 70°C
4 MATERIAL CONFORM TO THE ROHS STANDARD
5 DRIVER IC:IST7111