


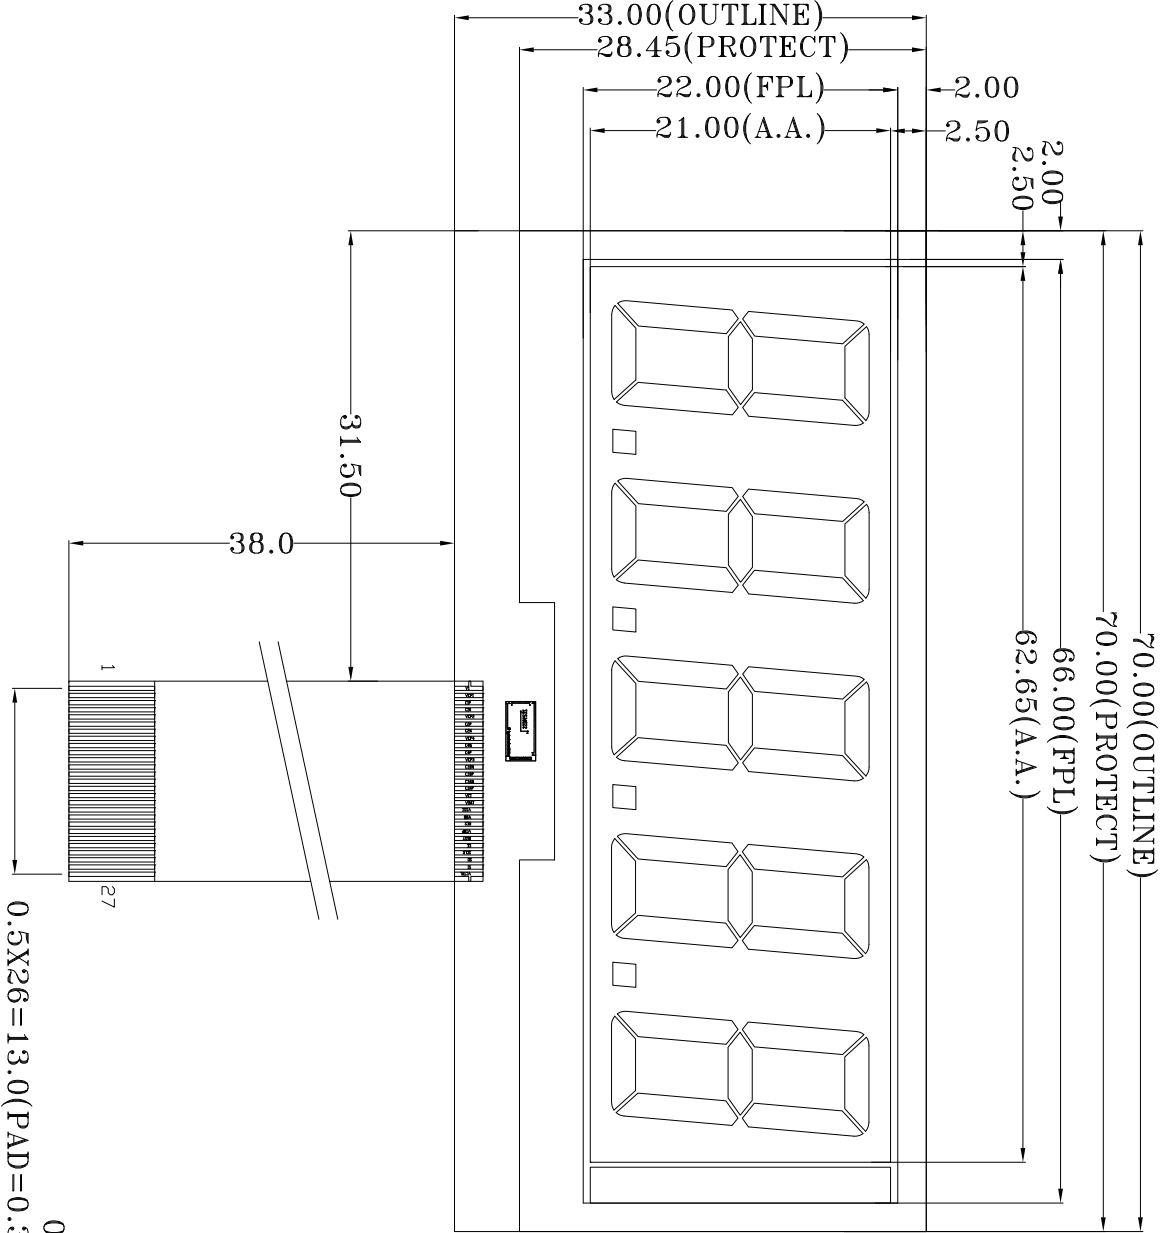

MAX1.5
1.10 (GLASS)

connective side

CN1

PIN	SIGNAL
1	V _I
2	V _{CP1}
3	C _{1P}
4	C _{1N}
5	V _{CP2}
6	C _{2P}
7	C _{2N}
8	V _{CP4}
9	C _{4N}
10	C _{4P}
11	V _{CP3}
12	C _{3BN}
13	C _{3BP}
14	C _{3AN}
15	C _{3AP}
16	V _{CI}
17	V _{BAT}
18	V _{SSC}
19	V _{DD}
20	RES
21	V _{CMP}
22	BUSY
23	CE
24	SCLK
25	SD
26	SI
27	V _{CTRL}

NOTE

- 1 TOLERANCES UNLESS OTHERWISE SPECIFIED :±0.2
- 2 ALL DIMENSIONS ARE IN mm
- 3 EPD DRIVING VOLTAGE: 3V
- 4 OPERATING TEMP: 0°C TO 50°C
STORAGE TEMP: -20°C TO 70°C
- 5 MATERIAL CONFORM TO THE ROHS STANDARD



DKE 东方科脉
液晶显示模组制造/LCD Inpanel Module

DESIGN MODEL	DEP0008
VAR.	A
CUSTOMER MODEL	DATE
CHECKED BY	APPROVED BY
PAGE 1/1	DRAWN BY
	HE ZHILING